

# Type C

Vibration mount



FIG. 01 Render

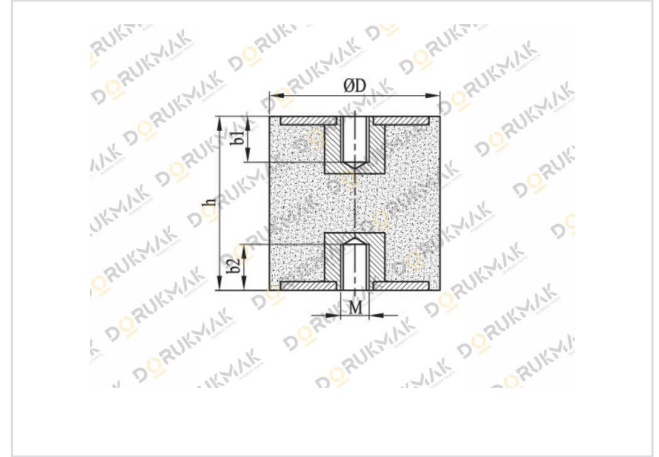


FIG. 02 Technical drawing

## Product specifications

|                        |                                                        |
|------------------------|--------------------------------------------------------|
| Material               | NR (Natural Rubber)                                    |
| Alternative material   | NBR, SBR, EPDM, SILICONE also available                |
| Metal                  | Zinc Coated                                            |
| Hardness               | 55 5 Shore A                                           |
| On demand hardness     | 35-90 Shore A                                          |
| Tolerance              | DIN 7715 M3                                            |
| Temperature resistance | -20°C / +80°C                                          |
| Working dimensions     | Ø08 – Ø200 mm                                          |
| Note                   | Other specs out of above standards are also available. |

## Standard sizes

| Reference code | ØD (mm) | h (mm) |
|----------------|---------|--------|
|----------------|---------|--------|

|         |    |    |
|---------|----|----|
| DC 1520 | 15 | 20 |
| DC 2015 | 20 | 15 |
| DC 2020 | 20 | 20 |
| DC 2025 | 25 | 25 |
| DC 2030 | 20 | 30 |
| DC 2515 | 25 | 15 |
| DC 2517 | 25 | 17 |
| DC 2520 | 25 | 20 |
| DC 2523 | 25 | 23 |
| DC 2525 | 25 | 25 |
| DC 2530 | 25 | 30 |
| DC 3015 | 30 | 15 |
| DC 3020 | 30 | 20 |
| DC 3025 | 30 | 25 |
| DC 3028 | 30 | 28 |
| DC 3030 | 30 | 30 |
| DC 3040 | 30 | 40 |
| DC 3525 | 35 | 25 |
| DC 3535 | 35 | 35 |
| DC 4020 | 40 | 30 |
| DC 4025 | 40 | 25 |
| DC 4027 | 40 | 27 |
| DC 4028 | 40 | 28 |
| DC 4030 | 40 | 30 |
| DC 4037 | 40 | 37 |
| DC 4040 | 40 | 40 |
| DC 4525 | 45 | 25 |
| DC 4535 | 45 | 35 |
| DC 5020 | 50 | 20 |
| DC 5021 | 50 | 21 |
| DC 5025 | 50 | 25 |

|          |     |    |
|----------|-----|----|
| DC 5030  | 50  | 30 |
| DC 5035  | 50  | 35 |
| DC 5040  | 50  | 40 |
| DC 5042  | 50  | 42 |
| DC 5045  | 50  | 45 |
| DC 5050  | 50  | 50 |
| DC 6025  | 60  | 25 |
| DC 6030  | 60  | 30 |
| DC 6035  | 60  | 35 |
| DC 6040  | 60  | 40 |
| DC 7025  | 70  | 25 |
| DC 7035  | 70  | 35 |
| DC 7040  | 70  | 40 |
| DC 7045  | 70  | 45 |
| DC 7525  | 75  | 25 |
| DC 7530  | 75  | 30 |
| DC 7535  | 75  | 35 |
| DC 7540  | 75  | 40 |
| DC 7545  | 75  | 45 |
| DC 7550  | 75  | 50 |
| DC 7555  | 75  | 55 |
| DC 7570  | 75  | 70 |
| DC 10030 | 100 | 30 |
| DC 10040 | 100 | 40 |
| DC 10050 | 100 | 50 |
| DC 10055 | 100 | 55 |
| DC 10060 | 100 | 60 |
| DC 10075 | 100 | 75 |
| DC 12540 | 125 | 40 |
| DC 15045 | 150 | 45 |
| DC 15050 | 150 | 50 |

|          |     |    |
|----------|-----|----|
| DC 15055 | 150 | 55 |
| DC 15060 | 150 | 60 |

### For a quote — Type C

The code and the annual quantity are all it takes; our sales engineers reply with a material and production proposal.

<https://dorukmak.com.tr/en/request-quote?sku=C>  
+90 224 483 60 90 · [info@dorukmak.com.tr](mailto:info@dorukmak.com.tr)

Dimensions are in millimetres. Tolerance, material and hardness are confirmed in writing with the quote.